

TRUGLO[®]

When Brightness Counts[™]

LASER RADIATION - DO NOT STARE INTO THE BEAM OR
VIEW DIRECTLY WITH OPTICAL INSTRUMENTS
CLASS 2 LASER PRODUCT
<1 mW 520nm 650nm CW
Certified to IEC 60825-1 Ed 2, 2007-03



Complies with FDA performance standards for laser products except for
deviations pursuant to Laser Notice No. 50, dated June 24, 2007
Model No: **TG7630G / TG7630R**
Serial No:
Mfg Date:

TRUGLO, Inc.
525 International Parkway
RICHARDSON, TEXAS 75081
MADE IN CHINA

Green Laser:
POWER OUTPUT <1mw
WAVELENGTH 500-540nm

Red Laser:
POWER OUTPUT <1mw
WAVELENGTH 630-670nm

TRUGLO, Inc.
525 International Parkway
Richardson, Texas 75081
Ph: 972-774-0300
Fx: 972-774-0323
E-mail: contactus@truglo.com

COMPLIES WITH 21 CFR 1040.10 AND 1040.11

 **WARNING**

This product is not a toy. Read all warnings and instructions prior to use. Property damage, serious injury or death may result from improper use. Keep out of the reach of children.

 **WARNING**

Laser light is extremely bright and can potentially cause permanent eye damage or interfere with critical operations if improperly used.

NEVER look into or stare at the laser beam or its reflection.

NEVER point the laser beam at a person or animal.

NEVER shine the laser at reflective surfaces.

NEVER point the laser beam at any type of moving vehicle, including aircraft. Such actions are unlawful and extremely dangerous.

NEVER point the laser beam at a person using binoculars or other magnifying instruments, such as rifle scopes, cameras or telescopes.

NEVER remove any safety label from the laser.

NEVER attempt to disassemble, repair or modify the laser. Such actions could lead to hazardous exposure.

! WARNING

Before you begin, always make sure the weapon is un-loaded and safe to handle.

! WARNING

Always practice safe handling techniques with any weapon.

! WARNING

Once mounted, the weapon will be pointed in the direction of anything illuminated by the laser.

! WARNING

Never point the laser at a target you do not intend to shoot.

! WARNING


Never engage the trigger until you are ready to fire. The laser can be activated without placing your finger inside the trigger guard.

On / Off

- Press either of the ambidextrous buttons to turn the laser on/off.
- The unit will automatically turn off after approximately 5 minutes of use to conserve battery power.

Pulse Mode

To activate the laser "pulse" mode, depress either on/off button for approximately 3 seconds. This process can be repeated to turn off the "pulse" mode.

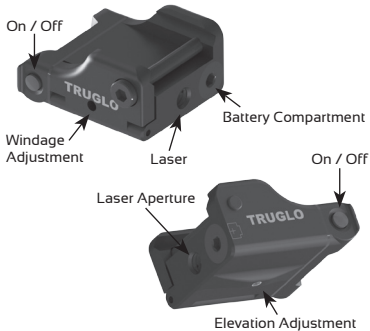

Mounting

CAUTION: CHECK TO MAKE SURE YOUR WEAPON IS UNLOADED.

- Your laser sight has integrated mounting rails that attach to a standard Weaver-style base or Picatinny rail.
- Loosen the mounting screw with the included 2.5mm allen wrench. Set the laser sight onto the mounting base of the weapon.
- The mounting screw should fit into one of the grooves in the top of the mounting base. Be sure the laser sight is fully seated on the mounting base before tightening the mounting screw. (PLEASE DO NOT OVER-TIGHTEN – Max Torque 4.4 Inch lbs.)
- For additional security, a drop of thread-locker can be added to the mounting screw.

Battery

- Your laser sight includes LR626 1.5V Button Cell lithium batteries (green laser requires 6 batteries; red laser requires 4 batteries).

CAUTION: CHECK TO MAKE SURE YOUR WEAPON IS UNLOADED.

- To replace the batteries, unscrew the battery cover counter-clockwise with the included 2.5mm allen wrench. Remove and replace the batteries with "+" side facing out. Reinstall battery cover. (PLEASE DO NOT OVER-TIGHTEN).
- Performance of your laser is optimal when operating temperatures are not extreme (cold or hot). Decreased performance at extreme temperatures is not a defect with the laser sight.

ZEROING (windage and elevation adjustments)

Please note that the laser has been pre-set at the factory to be aligned with the mounting base of the laser sight. Only minor windage and elevation adjustments should be required.

If significant adjustments are necessary, please make sure the laser sight is properly mounted or adjust the mounting base. The maximum adjustment is approximately ± 2 degrees, which is approximately 12.5 inches in all directions at 30 feet. Insufficient adjustment is not a defect with the laser sight.

CAUTION: ALWAYS USE EYE AND EAR PROTECTION. SHOOT ONLY AT AN APPROVED SHOOTING RANGE OR A SUITABLE SAFE AREA.

- After carefully firing at the target, **CHECK TO MAKE SURE YOUR WEAPON IS UNLOADED.**
- Make any necessary adjustments to the W/E adjustment screws using the included 1.25mm allen wrench.
- Turning the windage screw clockwise moves the POI to the right.
- Turning the elevation screw clockwise moves the POI down.
- Do not over-adjust the W/E adjustment screws. Stop turning if you feel any resistance.
- To reset the W/E settings, remove both adjustment screws. After approximately 10-20 minutes the laser should point high and to the left of target. Reinstall W/E screws and repeat zeroing process.

TWO-YEAR LIMITED WARRANTY

TRUGLO, Inc. warrants this product to be free from original defects in materials and workmanship for a period of TWO (2) YEARS from the date of original retail purchase, subject to the limitations set forth herein. This warranty applies only to the original retail purchaser and requires the purchaser to supply a copy of the original proof of purchase (original sales receipt) at the time warranty service is requested. No additional warranty "registration" is required.

If this product should malfunction or fail, contact us for a Return Merchandise Authorization number. The RMA number should be clearly marked on the outside of the package. Please include a complete description of the problem, your name, address, telephone number and a copy of the original proof of purchase. All transportation, insurance and freight charges associated with warranty service and repairs are the responsibility of the purchaser. Please include a check or money order in the amount of \$12.50 to cover processing and return postage. If an original defect is found by us, we will, at our option, repair, replace or make appropriate adjustment. For contact information go to www.truglo.com or call 972-774-0300.

This Limited Warranty does not apply to: (a) asserted defects caused by normal wear and tear of any part including knobs, camouflage finish, etc.; (b) asserted defects caused by modification, unauthorized service, accidents, neglect, misuse, abuse, improper maintenance, acts of Nature; (c) asserted defects involving subjective personal likes or judgments; (d) batteries; or (e) products purchased outside the USA.

THIS LIMITED WARRANTY IS THE EXCLUSIVE WARRANTY FOR THIS PRODUCT. WE DISCLAIM ANY AND ALL OTHER WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR OF MERCHANTABILITY. WE SHALL NOT BE LIABLE IN TORT, INCLUDING NEGLIGENCE OR STRICT LIABILITY, AND SHALL HAVE NO LIABILITY AT ALL FOR INJURY TO PERSONS OR PROPERTY. OUR LIABILITY FOR FAILURE TO FULFILL ANY OBLIGATION UNDER THIS LIMITED WARRANTY OR ANY OTHER LIABILITY IN CONNECTION WITH THIS PRODUCT SHALL BE LIMITED TO THE AMOUNT OF THE PURCHASE PRICE RECEIVED BY US FOR THE PRODUCT. THE REMEDIES STATED IN THIS LIMITED WARRANTY ARE THE PURCHASER'S EXCLUSIVE REMEDIES AGAINST US REGARDING THIS PRODUCT. UNDER NO CIRCUMSTANCES SHALL WE BE LIABLE FOR ANY INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES, INCLUDING LOST PROFITS AND REVENUES, INCONVENIENCE OR INTERRUPTIONS IN OPERATIONS, OR ANY OTHER COMMERCIAL OR ECONOMIC LOSSES OF ANY KIND. THESE LIMITATIONS AND DISCLAIMERS ARE NOT MADE BY US WHERE PROHIBITED BY LAW. SOME STATES PROHIBIT LIMITATIONS OF WARRANTIES AND THE PURCHASER MAY HAVE ADDITIONAL RIGHTS IN THOSE STATES.

www.TRUGLO.com